



2023



Connect :

Sales@madina-steel.net

002-0111 20 220 94 / 002-01021173848

6th October - Egypt





ALMADINA
STEEL Staples & Nails Industry

ALMADINA
STEEL Staples & Nails Industry




Connect :

Sales@madina-steel.net

002-0111 20 220 94

002-010 2117 38 48




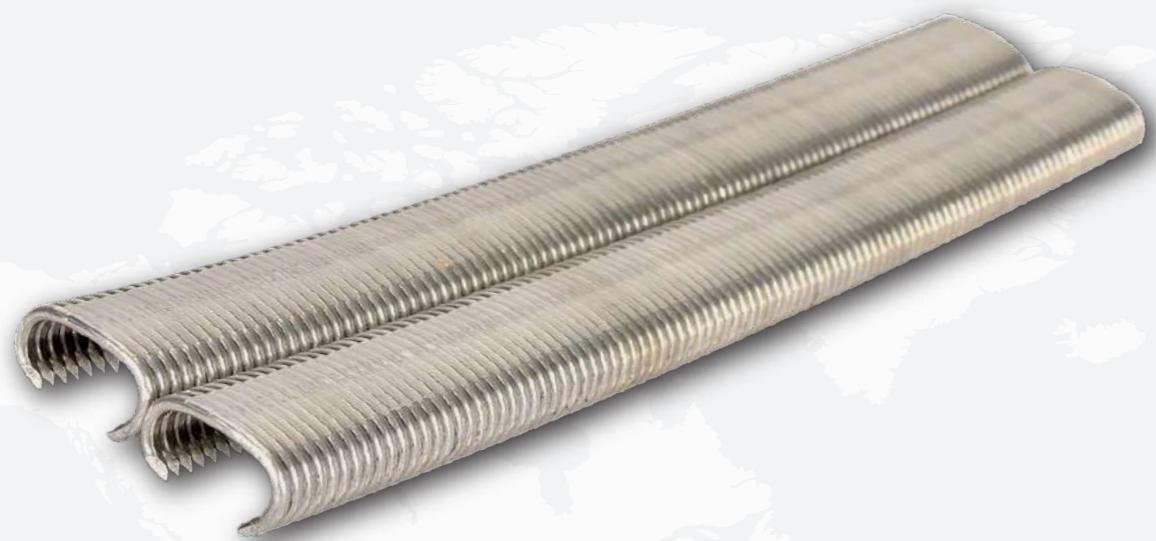

C Ring Staples Series

This product is "C" shape chain riveting. The product has two type standard sizes of 15GA and 16GA available for choice. The nail body diameter has two type specifications of 1.6 mm and 1.8 mm. The widest of "C" shape has two type different sizes of 16.9 and 23.7, which meet the requirements of the use of different models of gas nail gun.

Gauge : 15 / 16
Diameter : 1.8 / 1.6 mm
Outside Crown : 23.70 / 16.90 mm

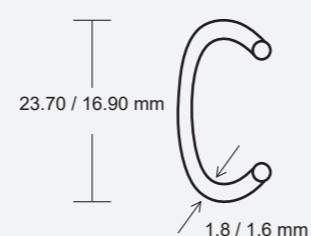

HR-22 Staples Series


This product is double-legs chain riveting. The section is trapezoid, which make the product more tightly when nailing materials in it. The rust protection galvanized technology is used on the whole nail, which accords with the international standard. There are many specifications available for choice.



Gauge : 16

Diameter : 1.60 ± 0.01 mm


Outside Crown : 22 mm

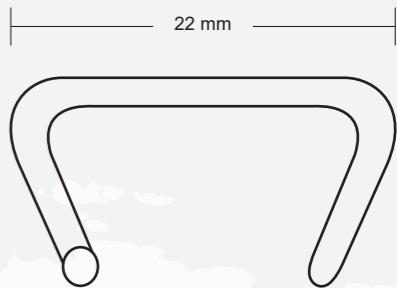


DT NAILS Series

This product is square body flat head straight line chain riveting, the single trimming cut nail point is used for it. The thickness of it is 1.7 ± 0.02 mm, the width is 2.15 ± 0.02 mm, the nail head standard diameter is 3.5~4mm, in addition, this product has 20 mm, 30 mm, 35 mm, 40 mm, 45 mm, 50 mm, 64 mm, nail head diameter available for choice, which is applicable to the use of standard specification gas nail gun.


Gauge : 14
Diameter : 2.02 ± 0.01 mm
Outside Crown : 3.5 ± 4.5 mm
Thickness : 1.7 ± 0.02 mm
Width : 2.15 ± 0.02 mm
Length : 20mm 30mm 35mm 40mm 45mm 50mm 64mm

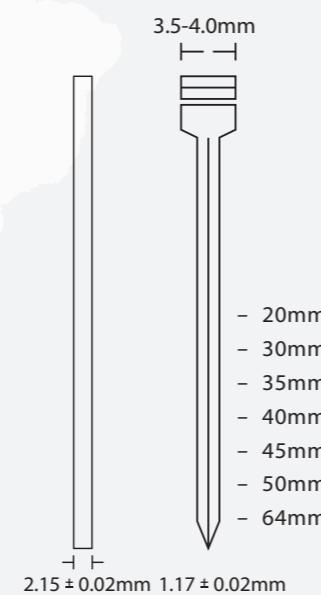

Gauge : 15
Model : 6500
Diameter : 1.78 ± 0.01 mm
Outside Crown : 11.10 ± 0.35 mm
Thickness : 1.55 ± 0.02 mm
Width : 1.88 ± 0.02 mm
Length : 22mm 25mm 28mm 32mm 38mm 45mm 50mm

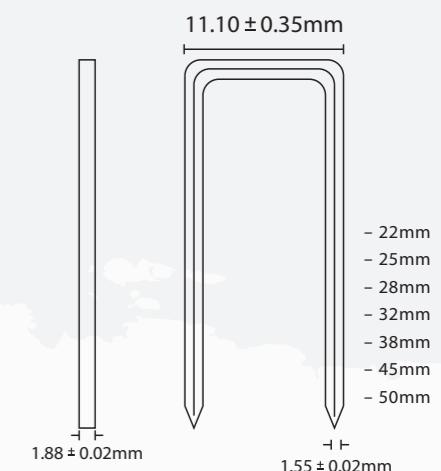


Gauge : 15
Model : 7500
Diameter : 1.82 ± 0.01 mm
Outside Crown : 12.65 ± 0.35 mm
Thickness : 1.61 ± 0.02 mm
Width : 1.88 ± 0.02 mm
Length : 22mm 25mm 28mm 32mm 38mm 45mm 50mm

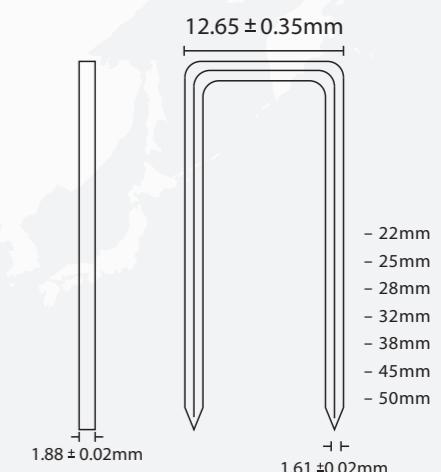

Q Staples Series

This product is square annular chain riveting. The nail body is adopting galvanized technology, with bright, rust protection effect. The standard spacing is used between the nail and nail, which make the use more smooth and easy.


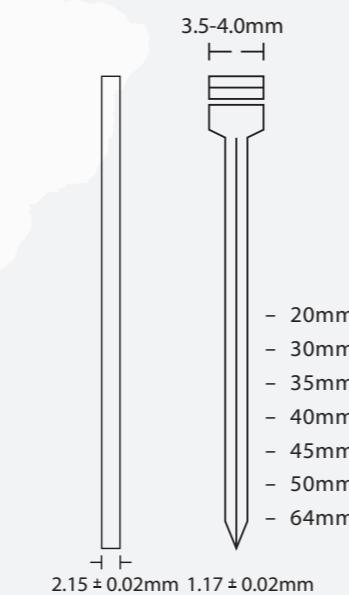


CARTON Staples Series

This product is right angle double-legs chain riveting. The rust protection technology is used for the nail body, with standardized nail body design, stable adhesive bond technology, and gorgeous color, which is applicable for various kinds of decorating project in modern place.

Gauge : 16
Model : 3500
Diameter : $1.57 \pm 0.01\text{mm}$
Outside Crown : $34.7 \pm 0.15\text{mm}$
Thickness : $0.85 \pm 0.03\text{mm}$
Width : $2.26 \pm 0.03\text{mm}$
Length : 15mm 18mm

Gauge : 17
Model : 3200
Diameter : $1.42 \pm 0.01\text{mm}$
Outside Crown : $31.8 \pm 0.2\text{mm}$
Thickness : $0.85 \pm 0.03\text{mm}$
Width : $1.9 \pm 0.03\text{mm}$
Length : 15mm 18mm

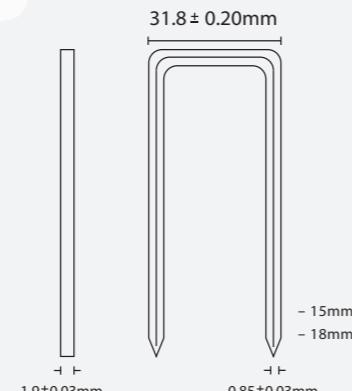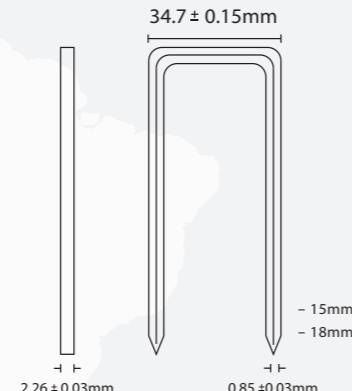

Gauge : 16

Diameter : $1.53 \pm 0.01\text{mm}$


Outside Crown : 1) 1600:25.20 ± 0.35mm 2) 2600:23.30 ± 0.35mm 3) 26.40 ± 0.35mm

Thickness : $1.33 \pm 0.02\text{mm}$

Width : $1.61 \pm 0.02\text{mm}$

Length : 16mm 19mm 22mm 25mm 28mm 32mm 38mm 40mm 45mm 50mm

25.20/23.30/26.40(±0.35mm)

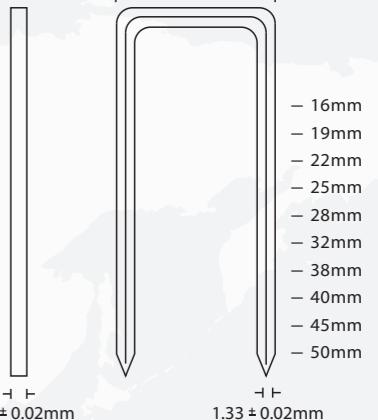

P Staples Series

The product is right angle double-legs chain riveting. The length of the product has 16mm, 19mm, 22mm, 25mm, 28mm, 32mm, 38mm, and many other specifications available for choice. The rust protection coating technology is used for the nail body, which is wearable and reliable.

N/55/100 Staples Series

This product is extra long double - legs chain riveting, is applicable for the extra material nailing. The product has been made of high quality galvanized iron wire has rust protection, stable and tight nailing characteristics.


Gauge : 16
Diameter : $1.53 \pm 0.01\text{mm}$
Head : 2.7 ± 3.0
Thickness : $1.33 \pm 0.02\text{mm}$
Width : $1.61 \pm 0.02\text{mm}$
Length : 18mm 25mm 32mm 38mm 45mm 50mm 57mm 64mm



T Nails Series

The single - leg extra long chain riveting has been made of high quality galvanized iron wire pressing. It has rust protection, stable and tight characteristic, is applicable for many other type standardized nail guns.


Gauge : 16
Diameter : $1.53 \pm 0.01\text{mm}$
Outside Crown : 1) 5600:11.30±0.35 2) 6600:10.70±0.35mm
Outside Crown : 3) 7600:12.00±0.35 2) 8600:12.70±0.35mm
Thickness : $1.33 \pm 0.02\text{mm}$
Width : $1.61 \pm 0.02\text{mm}$
Length : 22mm 25mm 28mm 32mm 38mm 45mm 50mm

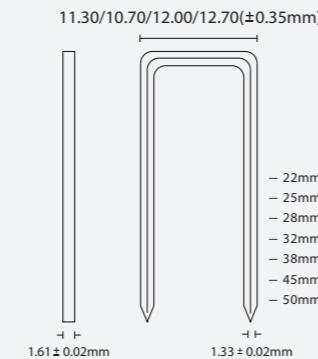


14(N) Staples Series

The section of double - leg chain riveting is rectangle. The length of the product has 22 mm, 25 mm, 28 mm, 32 mm, 38 mm, 45 mm, 50 mm, and many other type specification available for choice. The stable golden rust protection coating makes the product possess bright appearance.

Gauge : 17
Model : 1400
Diameter : $1.40 \pm 0.01\text{mm}$
Outside Crown : $10.40 \pm 0.01\text{mm}$
Thickness : $1.28 \pm 0.02\text{mm}$
Width : $1.46 \pm 0.02\text{mm}$
Length : 22mm 25mm 28mm 32mm 38mm 45mm 50mm

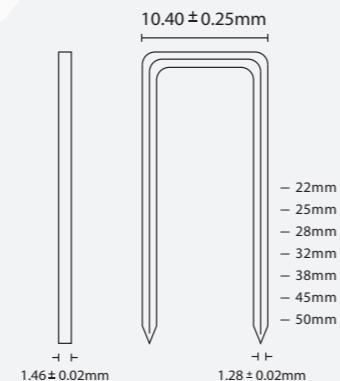

Gauge : 18
Diameter : $1.19 \pm 0.01\text{mm}$
Outside Crown : $5.80 \pm 0.20\text{mm}$
Thickness : $1.02 \pm 0.02\text{mm}$
Width : $1.27 \pm 0.02\text{mm}$
Length : 16mm 19mm 22mm 25mm 28mm 32mm 38mm 40mm

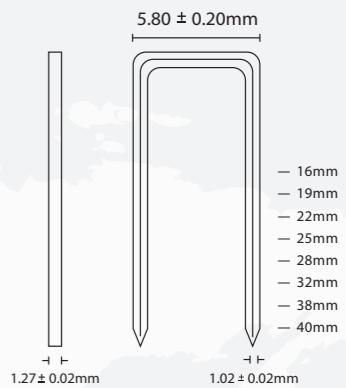


90(k) Staples Series

This product is narrow back-shaped nails. The maximum width on top of back shaped nail is 5.8 ± 0.2 mm. The product 16 mm, 19 mm, 22 mm, 25 mm, 28 mm, 32 mm, 38 mm, 40 mm, and many other type specifications available for choice.

92 Staples Series

The product is wide back-shaped nail, The maximum width on top of back-shaped nail is 8.7 ± 0.2 mm. The product has 16 mm, 19 mm, 22 mm, 25 mm, 28 mm, 32 mm, 38 mm, 40 mm, and many other type specifications available for choice. The nail body adopts high quality galvanized iron wire to product, which is fashionable and durable.

Gauge : 18
Model : 5800
Diameter : 1.19 ± 0.01 mm
Outside Crown : 8.7 ± 0.20 mm
Thickness : 1.02 ± 0.02 mm
Width : 1.27 ± 0.02 mm
Length : 16mm 19mm 22mm 25mm 28mm 32mm 38mm 40mm

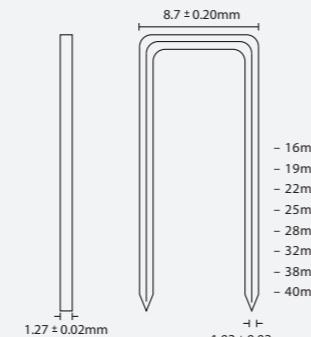

Gauge : 18

Diameter : 1.19 ± 0.01 mm

Outside Crown : 1) 1800:5.97 ± 0.2mm 2) 2800:5.24 ± 0.2mm 3) 3800:4.57 ± 0.2mm


Outside Crown : 4) 6800:10.07 ± 0.2mm 5) 7800:10.39 ± 0.2mm

Thickness : 1.02 ± 0.02 mm

Width : 1.27 ± 0.02 mm

Length : 16mm 19mm 22mm 25mm 28mm 32mm 38mm 40mm

5.97/5.24/4.57/10.07/10.39 (± 0.2 mm)



1.27 ± 0.02mm

1.02 ± 0.02mm

1800/2800/3800/6800/7800 Staples Series


The width on top of the product has 97 ± 0.2 mm, 5.24 ± 0.15 mm, 4.57 ± 0.2 mm, 10.07 ± 0.3 mm, 10.39 ± 0.2 mm and many other type specifications available for choice. The nail body has been made of high quality galvanized iron wire, which is sharp, solid and durable.

F Nails/MB Brad Series

The product is single - row type alligator stud. The length of the product has 10 mm , 15 mm , 20 mm , 25 mm , 30 mm , 35 mm , 40 mm , 45 mm , 50 mm pecifications available for choice. The nail body has been made of high quality galvanized iron wire, sharp but sturdy and durable.

Gauge : 18
Diameter : 1.19 ± 0.01mm
Head : 2.0 ± 0.1mm
Thickness : 1.02 ± 0.02mm
Width : 1.27 ± 0.02mm
Length : 10mm 15mm 20mm 25mm 35mm 40mm 45mm 50mm

Gauge : 18
Diameter : 1.19 ± 0.01mm
Head : 1.05 mm
Thickness : 1.02 ± 0.02mm
Width : 1.27 ± 0.02mm
Length : 10mm 15mm 20mm 25mm 35mm 40mm 45mm 50mm

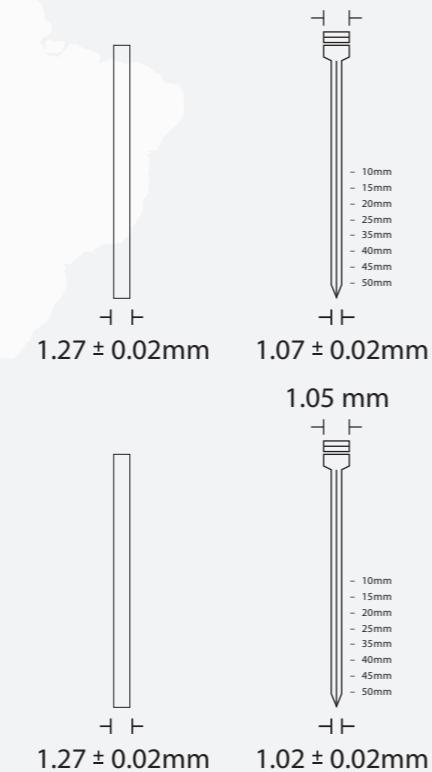

Gauge : 20


Diameter : 0.90 ± 0.01mm

Outside Crown : 5.05 ± 0.15mm

Thickness : 0.60 ± 0.02mm

Width : 1.14 ± 0.01mm

Length : 4mm 6mm 8mm 10mm 13mm 16mm 19mm 22mm

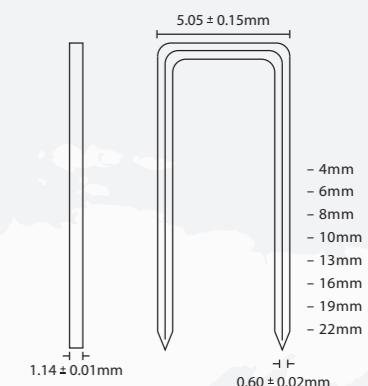


4J Staples Series

The width on top of the product is 5.05± 0.15 mm. The length of the product has 4 mm, 6 mm, 10 mm, 13 mm, mm, 19 mm, 22 mm, and many other type specifications, which is applicable for nailing timber of various thickness.

10J Staples Series

The product has been made of high quality galvanized iron wire. The width on top of the product is $11.2 \pm 0.10\text{mm}$. The length of the nail body has 4 mm, 6 mm, 8 mm, 10 mm, 13 mm, 16 mm, 19 mm, 22 mm, and many other type specification available for choich.


Gauge : 20
Diameter : $0.90 \pm 0.01\text{mm}$
Outside Crown : $11.2 \pm 0.10\text{mm}$
Thickness : $0.60 \pm 0.02\text{mm}$
Width : $1.14 \pm 0.01\text{mm}$
Length : 4mm 6mm 8mm 10mm 13mm 16mm 19mm 22mm

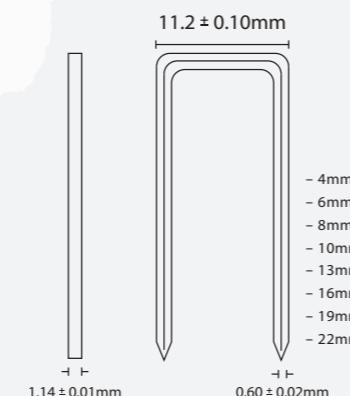

88 (12J) Staples Series

This product adopts environment - friendly technique to product. The rectangle nail body is sharp and solid. The width on top of the nail is $13.2 \pm 0.1\text{mm}$. There are many type specifications available for choich.


Gauge : 20
Diameter : $0.90 \pm 0.01\text{mm}$
Outside Crown : $13.2 \pm 0.10\text{mm}$
Thickness : $0.48 \pm 0.02\text{mm}$
Width : $1.23 \pm 0.01\text{mm}$
Length : 18mm 20mm 22mm

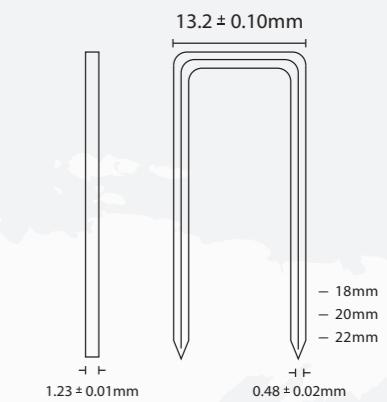

A11 Staples Series

This product has been made of high quality galvanized iron, which is exquisite and smooth, is more convenient to use. The design of the nail body accords with the best proportion of length and width, which is solid and durable.


Gauge : 20
Diameter : 0.86 ± 0.01mm
Outside Crown : 10.60 ± 0.20mm
Thickness : 0.48 ± 0.02mm
Width : 1.23 ± 0.02mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm 16mm

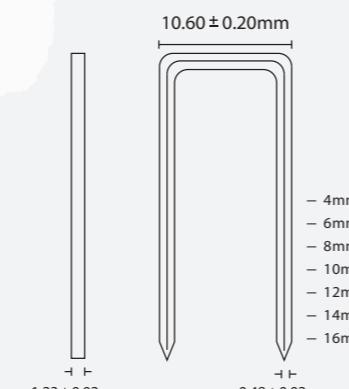

50 Staples Series

This product has been made of galvanized iron wire, with excellent rust protection effect. The stable excellent binder makes the product adhesive bond between the binder and product not easily dropping off and disorder. It has speedy entering nail, and reducing drive pin adhesive bonding effects.


Gauge : 20
Diameter : 0.86 ± 0.01mm
Outside Crown : 12.36 ± 0.25mm
Thickness : 0.48 ± 0.02mm
Width : 1.23 ± 0.015mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm 16mm

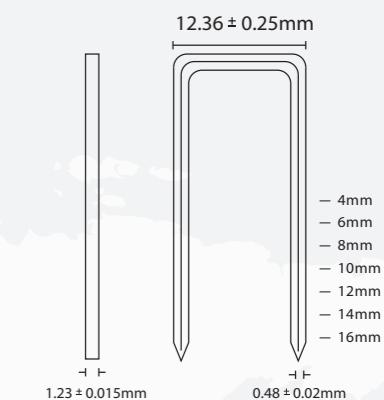

STCR5019 Staples Series


The arch design and rust protection and galvanized technology are used for the backside of the product. The design of nail body accords with the best proportion of length and width, which increase the solidness of the nail, while expanding the range of the use of the product.

Gauge : 20
Diameter : $0.86 \pm 0.01\text{mm}$
Outside Crown : $11.42 \pm 0.26\text{mm}$
Thickness : $0.48 \pm 0.02\text{mm}$
Width : $1.23 \pm 0.01\text{mm}$
Length : 6mm 8mm 10mm 12mm 14mm

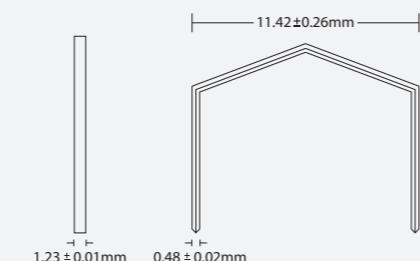

SB2019 Staples Series


The width on top the this product is $12.66 \pm 0.25\text{ mm}$. The length of the product has 6 mm , 8 mm , 10 mm , 12 mm , 14 mm and many other type specification available for choice, which is applicable for nailing timber of various thickness.

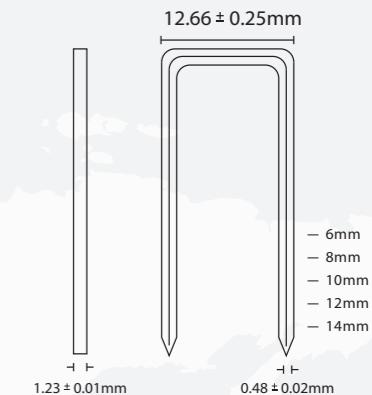

Gauge : 20
Diameter : $0.86 \pm 0.01\text{mm}$
Outside Crown : $12.66 \pm 0.25\text{mm}$
Thickness : $0.48 \pm 0.02\text{mm}$
Width : $1.23 \pm 0.01\text{mm}$
Length : 6mm 8mm 10mm 12mm 14mm

80 Staples Series


The top width of the product is $12.75 \pm 0.2\text{ mm}$. The length has 4 mm, 8 mm, 10 m, 12 mm, 14 mm, 16 mm, and other various specifications available, and also has two types of galvanized and copper plating surface treatment technology product available for choice.

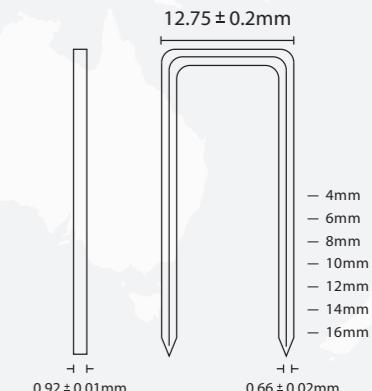

Gauge : 21
Diameter : $0.83 \pm 0.01\text{mm}$
Outside Crown : $12.75 \pm 0.2\text{mm}$
Thickness : $0.66 \pm 0.02\text{mm}$
Width : $0.92 \pm 0.01\text{mm}$
Length : 4mm 6mm 8mm 10mm 12mm 14mm 16mm

84 Staples Series


The width on top of the product is 12.3 ± 0.2 mm. The width of the product has 4 mm, 6 mm, 8 mm, 10 mm, 12 mm, 14 mm, 16 mm, and many other specifications. The surface adopts copper plating technology, which has rust protection, gorgeous characteristics.

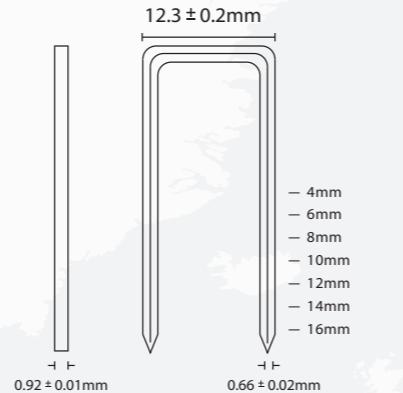

Gauge : 21
Diameter : 0.83 ± 0.01 mm
Outside Crown : 12.3 ± 0.2 mm
Thickness : 0.66 ± 0.02 mm
Width : 0.92 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm 16mm

71 Staples Series


The width on top of the product is 12.3 ± 0.2 mm. The length of the product has 4 mm, 6 mm, 8 mm, 10 mm, 12 mm, 14 mm, 16 mm and many other specifications. The surface adopts copper plating technology, which has rust protection, fashionable characteristics.

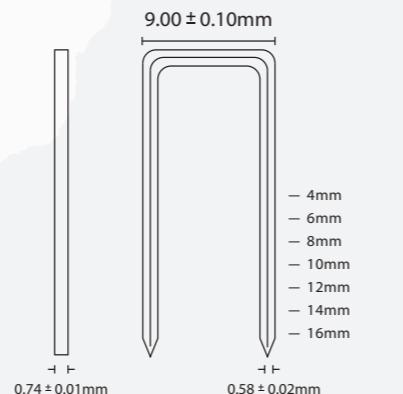

Gauge : 22
Diameter : 0.7 ± 0.01 mm
Outside Crown : 9.00 ± 0.10 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.74 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm 16mm

14 Staples Series


The width on top of the product is 10.0 ± 0.1 mm. The length of the product has 4 mm, 6 mm, 8 mm, 10 mm, 12 mm, 14 mm, 16 mm and many other type specifications. The surface adopts copper plating technology, which has rust protection, gorgeous characteristics.

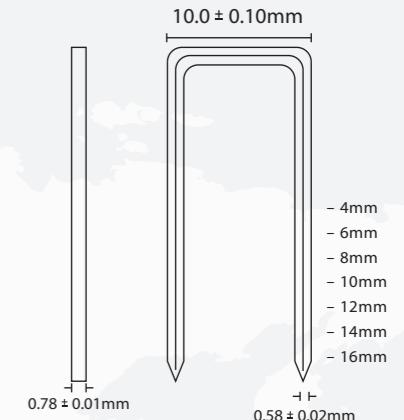

Gauge : 22
Diameter : 0.7 ± 0.01 mm
Outside Crown : 10.0 ± 0.10 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.78 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm 16mm

10F Staples Series


The width on top of the product is 12.3 ± 0.2 mm. The length of the product has 4 mm, 6 mm, 8 mm, 10 mm, 13 mm, and many other type specifications. The surface adopts copper plating technology, which has rust protection, fashionable characteristics.

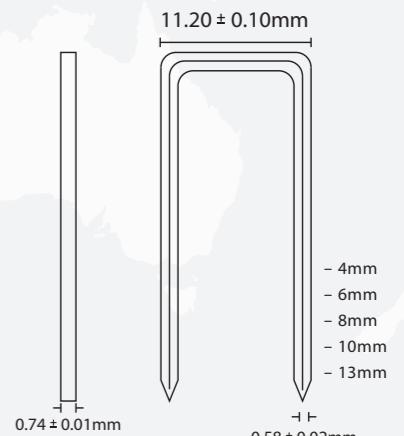

Gauge : 22
Diameter : 0.69 ± 0.01 mm
Outside Crown : 11.20 ± 0.10 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.74 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 13mm

13/1008F Staples Series


The width on top of the product is 10.5 ± 0.1 mm. The length of the product has 4 mm, 6 mm, 8 mm, 10 mm, 14 mm, and many other specifications. The surface adopts copper plating technology, which has rust protection, fashionable characteristics.

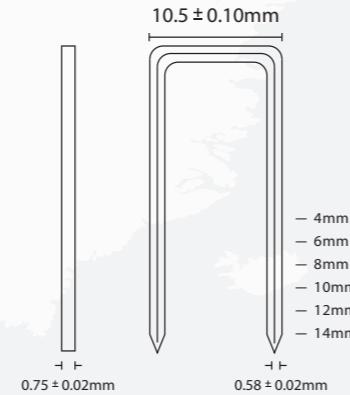

Gauge : 22
Diameter : 0.68 ± 0.01 mm
Outside Crown : 10.5 ± 0.10 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.75 ± 0.02 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm

18 Staples Series


The width on top of the product is 12.53 ± 0.1 mm. The length of the product has 4 mm, 6 mm, 8 mm, 10 mm, 14 mm, and many other type specifications. The surface adopts copper plating technology, which has rust protection, fashionable characteristics.

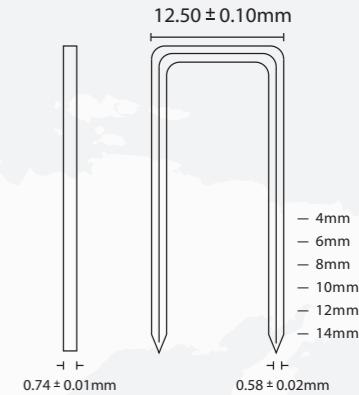

Gauge : 22
Diameter : 0.69 ± 0.01 mm
Outside Crown : 12.50 ± 0.1 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.74 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm

23 Staples Series


The product has been made of galvanized iron wire, with excellent protection effect. The stable excellent binder makes the product adhesive bond between the binder and product not easily dropping off and disorder. It has speedy entering nail, and reducing drive pin adhesive bonding effects.

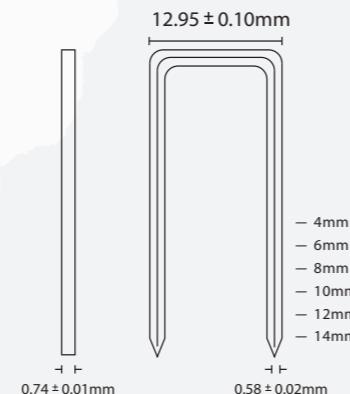

Gauge : 22
Diameter : 0.68 ± 0.01 mm
Outside Crown : 12.95 ± 0.10 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.74 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm

33 Staples Series


This product adopts environment-friendly technique to product. The rectangle nail body is sharp and solid. The width on top of the nail is 7.65 ± 0.05 mm. There are many type specifications available for choice.

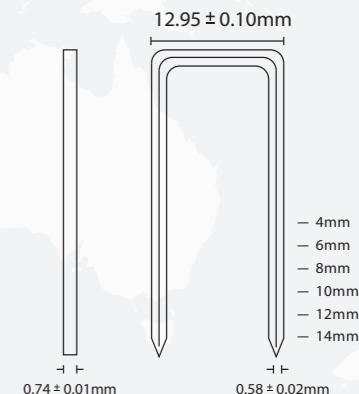

Gauge : 22
Diameter : 0.69 ± 0.01 mm
Outside Crown : 7.65 ± 0.05 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.74 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm

31 Staples Series

The width on top of the product is 9.4 ± 0.05 mm. The length of the product has 4 mm, 6 mm, 8 mm, 10 mm, 14 mm and many other type specifications. The surface adopts copper plating technology, which has rust protection, fashionable characteristics.

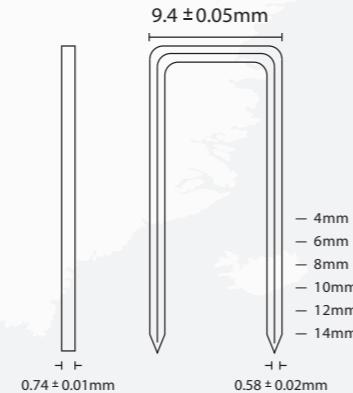

Gauge : 22
Diameter : 0.69 ± 0.01 mm
Outside Crown : 9.4 ± 0.01 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.74 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm

Gauge : 14
Diameter : 2.1 ± 0.1 mm
Head : 6.00 - 7.00 mm
Length : 18mm 32mm 38mm 45mm 50mm 57mm 64mm




ST/WT(HT) Nails Series

This product is round flat head straight line chain riveting. The nail point is traditional prismatic shape structure. It is applicable to international standard gas nail gun. The nailhead diameter is 6~7mm. The nail body diameter is 2~2mm. The length of the nail has 18mm, 25mm, 32mm, 38mm, 45mm, 50mm, 57mm, 64mm, and many other type specifications available for choice, which is applicable for various kinds of modern decorating project.



53 Staples Series

This product has been made of galvanized iron wire, with excellent rust protection effects. The stable excellent binder makes the product adhesive bond between the binder and product not easily dropping off and disorder. It has speedy entering nail, and reducing drive pin adhesive bonding effects.

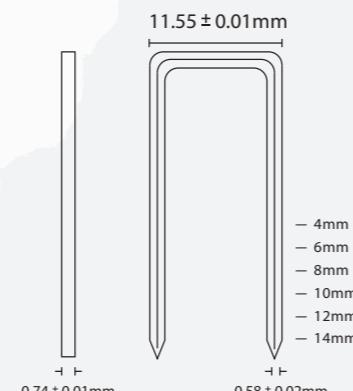

Gauge : 22
Diameter : 0.69 ± 0.01 mm
Outside Crown : 11.55 ± 0.1 mm
Thickness : 0.58 ± 0.02 mm
Width : 0.74 ± 0.01 mm
Length : 4mm 6mm 8mm 10mm 12mm 14mm